

Dingli SL3025HRT

Key Features

1 32m working platform: Reaching new heights

Tackle the tallest jobs with confidence. The SL3025HRT delivers a 32-metre working height, making it one of the highest-reaching hybrid scissor lifts available. Ideal for large-scale construction, cladding and maintenance where boom lifts fall short.

2 1,000kg capacity: Take the whole team up

When working at serious height, taking the whole team and all their tools up in one trip can make all the difference. With a 1,000kg platform capacity, the SL3025HRT makes it easy to lift multiple operators, equipment and materials safely and efficiently.

3 Hybrid power: The best of both worlds

Work anywhere, without compromise. Run on the reliable Kubota 9.8 kW diesel engine which can be ideal for extended outdoor use. Alternatively switch to the high-capacity 80V/420Ah lithium battery for clean, quiet operation in low-emission or noise-sensitive environments.

4 Four-wheel drive: Rough terrain ready

Built to handle the toughest conditions. With 4WD, oscillating axles, hydraulic outriggers and 30% gradeability, the SL3025HRT delivers reliable off-road performance wherever the job takes you.

5 Safety-first design: Confidence at every height

Safety comes built-in. Features including a self-locking platform gate, Platform Load Sense System, tilt alarm and automatic levelling outriggers all come as standard, providing reliable protection for operators working at height. The ability to drive at full height further enhances productivity without compromising safety.



Contact us today on
1300 925 577

e: sales@abslift.com.au | w: www.abslift.com.au



Dingli SL3025HRT





Key Features

Dimensions	Metric	British
Max. Working Height A	32.00m	105ft
Max. Platform Height B	30.00m	98ft 5in
Overall Length C	6.73m	22ft 1in
Overall Width D	2.55m	8ft 4in
Overall Height (Rails Up) E	4.13m	13ft 7in
Overall Height (Rails Down) F	3.19m	10ft 6in
Platform Size (L×W)	6.20m × 2.45m	20ft 4in × 8ft
Platform Extension Size G	2.10m	6ft 11in
Ground Clearance	0.20m	8in
Wheelbase H	4.86m	15ft 11in
Turning Radius (Inside/Outside)	3.80m / 6.30m	12ft 6in / 20ft 8in
Tyres	15-625	15-625

Performance	Metric	British
S.W.L	1000kg	2,204lb
S.W.L on Extension	1000kg	2,204lb
Max. Occupants (Indoor/Outdoor)	4 / 4	4 / 4
Gradeability	30%	30%
Travel Speed (Stowed)	3.5km/h	2.17mph
Travel Speed (Raised)	0.3km/h	0.19mph
Max. Working Slope	2° / 3°	2° / 3°
Up/Down Speed	150 / 120sec	150 / 120sec

Weight	Metric	British
Overall Weight	24,400kg	53,793lb

Power	Metric	British
Diesel Engine (Generator)	KUBOTA Z482 (9.8kW/3600rpm)	KUBOTA Z482 (9.8kW/3600rpm)
Diesel Tank	130L	34gal
Hydraulic Tank	260L	69gal
Lithium Battery	80V / 420Ah	80V / 420Ah
Charger	80V / 80A	80V / 80A
Driving Motor	4×56VDC / 6.0kW	4×56VDC / 6.0kW
Lifting Motor	53VAC / 28kW	53VAC / 28kW

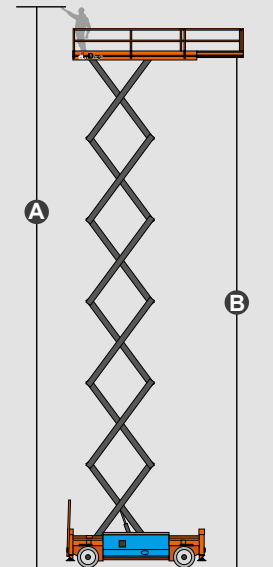

Contact us today on
1300 925 577

e: sales@abslift.com.au | w: www.abslift.com.au

