

Skyjack SJ66T+

Key Features

1 22m working height: Reach more, reposition less

Take on high access work with confidence. The SJ66T+ delivers a 22-metre working height and 17.38-metre outreach, allowing operators to cover more area without constantly repositioning the machine. Ideal for large-scale construction, steelwork and infrastructure projects.

2 Dual capacity 454kg: More people, more tools, fewer trips

With a dual platform capacity of up to 454kg, the SJ66T+ is built to handle demanding site work. Safely lift multiple operators along with tools and materials in a single pass, reducing downtime and improving overall efficiency on site.

3 50% gradeability: Built for real site conditions

Rough terrain is part of the job. With 50% gradeability, 4WD and an oscillating axle, the SJ66T+ handles uneven ground, slopes and challenging surfaces with ease. It keeps you moving where other machines would struggle.

4 Drive at full height: Keep the job moving

Minimise interruptions and maximise productivity. The ability to drive at full height allows operators to reposition quickly without lowering the platform, saving time on every task and keeping work flowing.

5 Precision positioning: Get exactly where you need to be

A 360° continuous turret rotation combined with a jib and strong horizontal reach gives operators precise control at height. Position accurately around structures and obstacles, reducing the need for constant machine movement and improving efficiency.



Contact us today on
1300 925 577

e: sales@abslift.com.au | w: www.abslift.com.au




Skyjack SJ66T+


Key Features

Dimensions		SJ66 T+
Work Height		22.19 m
Platform Height		20.19 m
Horizontal Reach		17.38 m
Platform Size	A	0.91 x 2.44 m
Stowed Width	B	2.44 m
Tailswing	C	1.33 m
Stowed Height	D	2.59 m
Transportation Height	E	3.30 m
Stowed Length	F	10.40 m
Transportation Length	G	8.13 m
Wheelbase	H	2.44 m
Ground Clearance	I	0.41 m

SPECIFICATIONS		SJ66 T+
Rotation		360° Continuous
Platform Rotation		170°
Jib Length		1.52 m
Jib Range +/-		+65° / -60°
Weight		3.5km/h
Gradeability		50%
Turning Radius (Inside)		1.93 m
Turning Radius (Outside)		5.05 m
Axle Oscillation		8.89 cm
Drive Speed (High speed)		7.2 km/h
Capacity		300 / 454 kg
Local Floor Load (With Rated Load)		17.44 kg/sq cm
Overall Floor Load (With Rated Load)		1,558 kg/sq m
Maximum Wind Rating		12.5 m/s
Personnel Rating at Max Wind Rating		2 / 3
Tyre Type		Foam-Filled, NM
Tyre Size		385/65D19.5
Diesel Engine Deutz		D2011L04i - 65 HP (48 KW)
Fuel Tank Capacity		170 L
Hydraulic Reservoir		227 L

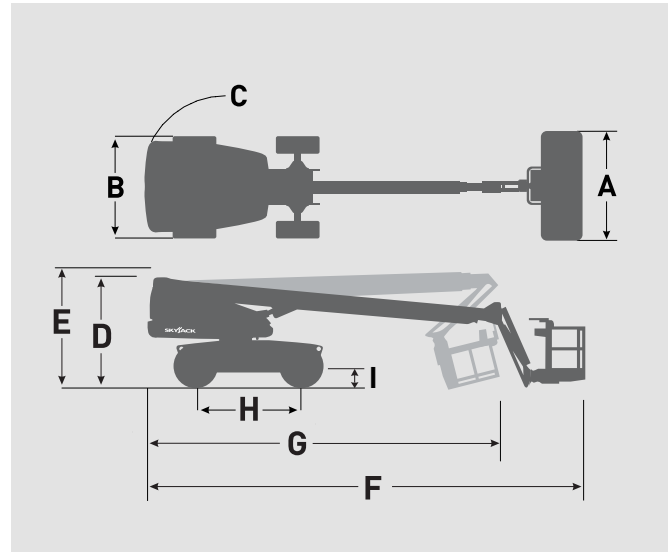

SJ66 T+ WORKING ENVELOPE

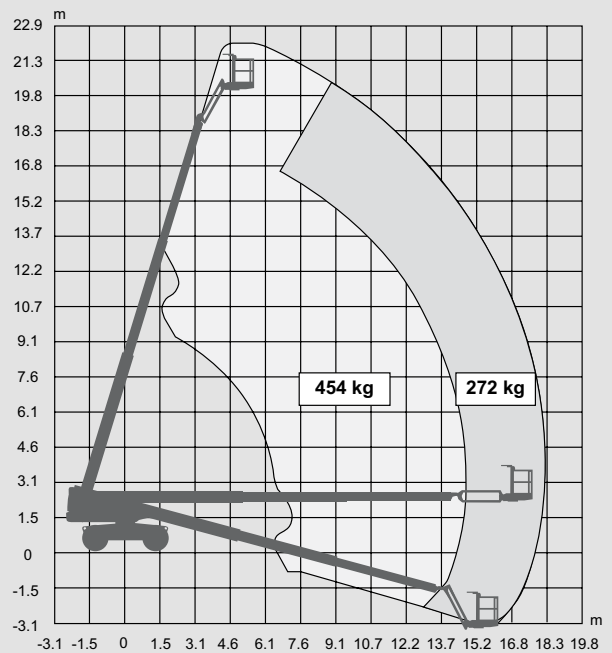

Contact us today on
1300 925 577

e: sales@abslift.com.au | w: www.abslift.com.au

